


NEW

VERTEC

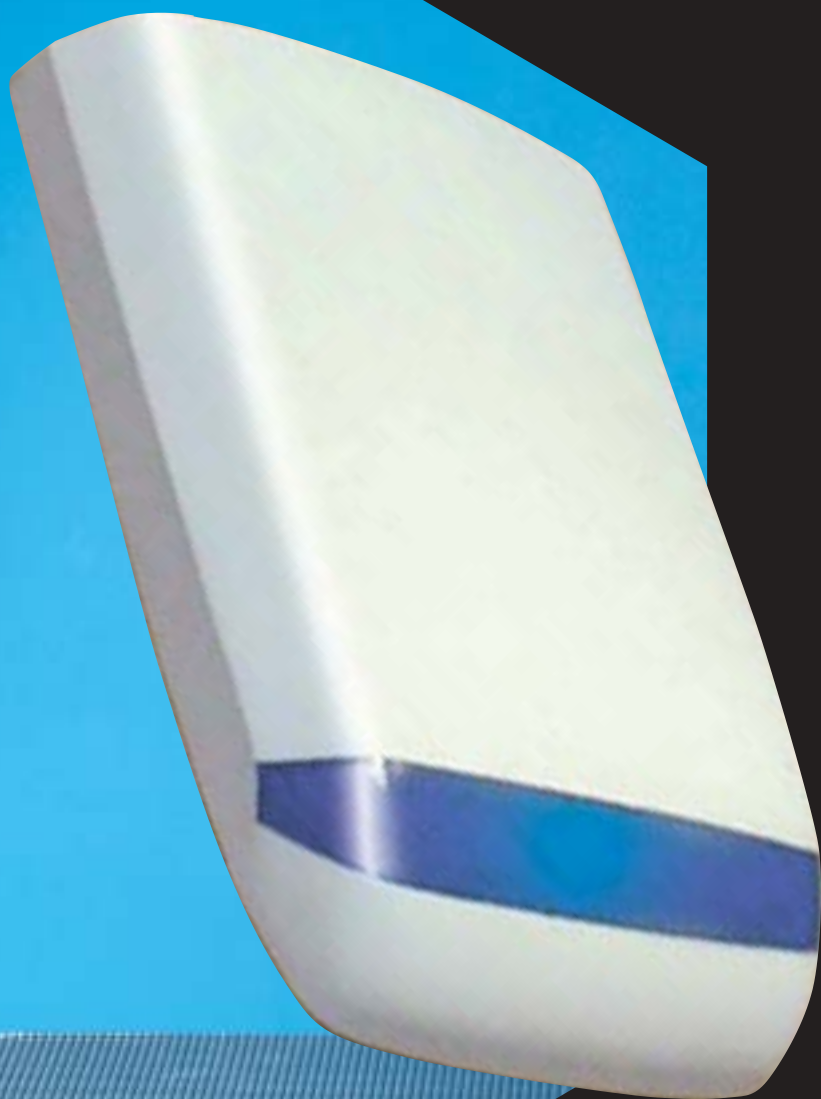

ELMDENE

*Security & Fire
Products*

Benefits:

- Stylish External Sounder
- Unique modern shape
- Vertical mounting
- Choice of models including economic Contractor model (Vertec 1000)
- Internal protection against harsh environments for long life
- 'Engineer Friendly' for easy installation and maintenance
- Low current consumption
- Economic multiple installations
- Individual Cover logo can be supplied

Features:


- POLYCARBONATE COVER (3mm)
- ELECTRONICS ENCLOSED IN POLYCARBONATE OR METAL INNER COVER
- POLYCARBONATE OR METAL BACKPLATE
- DUAL PIEZO SOUNDERS
- TWIN LEDs (SELECTABLE)
- SINGLE PIEZO AND LED ON CONTRACTOR MODEL (VERTEC 1000)
- 15 MINUTE CUT-OFF TIMER (SELECTABLE)
- SAB FACILITY WITH ON-BOARD 12V NICAD BATTERY
- ENGINEER MODE FOR SILENT START-UP
- FRONT AND BACK TAMPERS
- OPTIONAL FOAM DETECTION
- SCREEN PRINTING AVAILABLE

***External Sounders
you can rely on***

www.elmdene.co.uk



INTRUDER

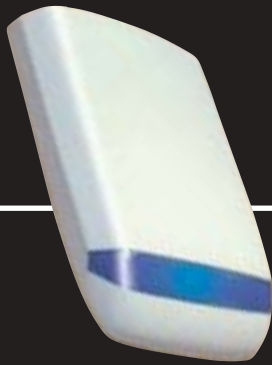

VERTEC

Specifications

Materials:

Cover

Polycarbonate (3mm thickness)

Backplate and Inner Cover:

Vertec 3000

Polycarbonate (3mm)

Vertec 5000

Galvanised Steel (1.2mm)

Strobe:

Input Voltage

12V dc Nominal

Flash Rate

1 per Second

Current Drain

100mA Nominal

Siren:

Model	Input Voltage (V dc Nominal)	Operating Voltage (V)	Twin/Single Piezo	Sound Output (dB at 1m)	Current (mA Nominal)
Vertec 1000	12	13.8	Single	112	200
Vertec 3000	12	13.8	Twin	118	200
Vertec 5000	12	13.8	Twin	118	200

Cut-Off Timer

5 sec, 3 min, 10 min, 15 min or No Timer

Trigger Modes

Positive, Negative or Volts-free

Full SAB

12V NiCad Battery

Vertec 3000 and Vertec 5000:

Selectable LEDs (On, Off or Flashing)

Vertec 1000:

Single LED

Tamper Return


Positive, Negative or Volts-free

Replaceable Battery

By connecting into terminal block

Engineer Mode

Silent start-up during installation and maintenance



ELMDENE

Security & Fire
Products

ELMDENE INTERNATIONAL LIMITED
Rodney Road, Fratton, Portsmouth PO4 8SS United Kingdom
Tel: +44 (0)23 9273 9412 Fax: +44 (0)23 9281 1631
e-mail: sales@elmdene.co.uk

www.elmdene.co.uk